Silent series








Separate brochures are available for:


▲ Audipack® AV product for professionals



Audipack® furniture, Transport-and flightcases

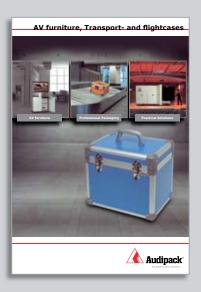

Silent series	4-7
Silent series 6300	8-9
Technical specifications Silent series 6300	11
Silent series 9300	12-13
Technical specifications Silent series 9300	15
Silent series 9300WE	16-17
Technical specifications Silent series 9300WE	19
Silent series 9500	20-21
Technical specifications Silent series 9500	23
General options	26-27

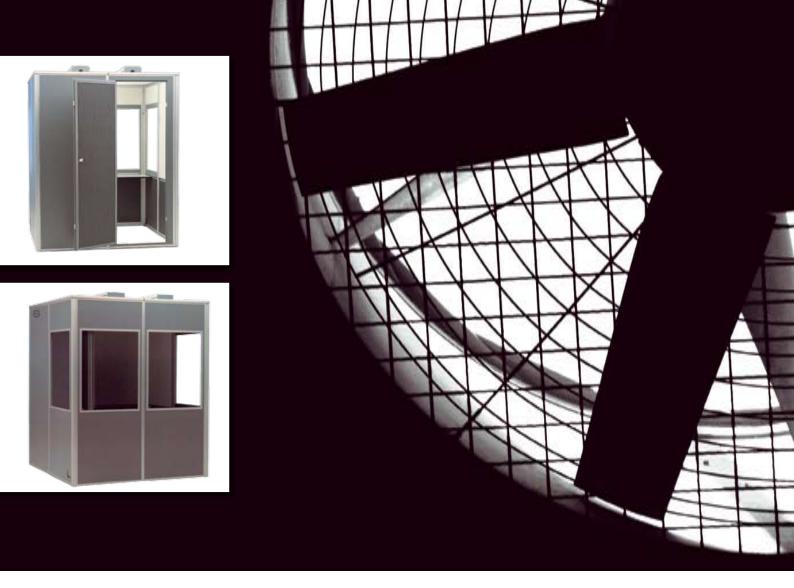

Anything is possible with Audipack!

Audipack has succeeded in developing a new and improved type of portable interpreter booth for simultaneous nterpretation.

The highest ISO standards and requirements, indicated by users, have resulted in the AUDIPACK "SILENT Series" Interpreter booths. The Silent Series consists of three versions, the Silent 6300, the Silent 9300 and 9500. All versions are fully transportable. The Silent 6000 series has the utmost performance in sound insulating, the Silent 9000 series are lighter in weight and has less components.

Anything is possible. It's great to have solutions...

The SILENT Series are:

- ▲ High Sound insulating
 Silent 9300 and 9500:
 better than ISO norm 4043 (last version)
 Silent 6300: better than ISO 4043 and,with
 double glass confirm DIN 56924
- ▲ Offering freedom of configuration
- ▲ Fully transportable
- ▲ Offering the possibility to extend in any direction
- ▲ User friendly and easy, swift to mount
- ▲ Durable
- ▲ Good looking
- ▲ Comfortable
- ▲ Suitable for all types of conference systems
- ▲ Offering plenty of space for 2 or 3 interpreters




The product

In the developing process of these booths, Audipack has paid full attention to a combination of requirements, i.c. flexibility, weight, good looking high quality materials, user friendliness and durability.

The scratch-resistant outside in combination with anodised aluminium frames gives an attractive and professional appearance. Safety glass (6 mm) is used for the window-elements (plexiglass windows are optional). Double safety glass is also

optional for the Silent 6300 (DIN 56924). Even when the booth is frequently moved, it's appearance will remain attractive.



Note: Audipack always offers clients the possibility to change the specifications of a 'standard' product to match individual needs.

Ventilation

Clean and fresh air is important. Therefore Audipack offers 2 types of ventilation systems.

On top of the booth, two build-up low profile ventilation channels are fixed, each with a very noiseless horizontal mounted fan. (System A, standard for the SILENT 6300 and optional for the SILENT 9300 and 9500)

There is also the possibility to order a separate ventilationsystem that is removable from the booth. This gives you the freedom to connect the booth to a separate airconditioning system. (system B, optional)

An air-inlet is situated in the doorpanel to provide fresh air.

Assembly in general

The booths of the "SILENT Series" are constructed with vertical panels.

In the standard configuration, $1600 \times 1600 \times 2000 \text{ mm}$ (internal), the Silent 9300 consists of 8 standard panels of $800 \times 2000 \text{ mm}$ and 2 roof elements.

The standard Silent 6000 consists of 8 wall panels, 2 roof elements and 2 floor elements.

The Silent Series are easy and swift to mount. One person can do the job by using a hex key. The connection of one element with another is achieved by using special locks.

All elements/panels are interchangeable, thus there is no difficulty to adapt the construction to local conditions. Even the door can be placed in every side. The roof elements are connected with each other in the same way as the wall elements, resulting in a safe and solid construction.

Unlike the Silent 9300 and 9500, the Silent 6000 series has floor elements.

The vertical elements need to be mounted on these floor elements. Horizontal adjustment of the floor elements is possible to obtain a perfectly horizontal floor.



The Silent 6300 as well as the Silent 9300 and 9500 easily be extended to 1600×2400 mm (internal) by simply adding extra panels. The Silent 9300 up to 3200 mm for 4 persons.





Transportation

Audipack has different possibilities for transportation of the "Silent Series" interpreter booth.

Based on years of experience Audipack has designed a special flightcase for all types of the Silent Series, including space for the table, ventilation-system and lighting equipment. There is also a special flightcase for an extended Silent 9300 and 9500 (1600 x 2400 mm).

Besides the flightcases there are two different "Boothcars" for easy transportation.

Both products are suitable for temporary storage as well as for frequent transporting.

Equipment

Ample working space is created, covering the total width of the booth. The large working table provides plenty of space to install any type of equipment.

Cable in- and outlets are situated in the sidewalls (Silent 9300 and 9500) of the cabin and in the working table. The Silent 6300 has cable-outlets in a floor element. The working table in the Silent 6300 has an extra shelf underneath for optimal use of the table surface. (Optional for Silent 9300 and 9500)

Environment

All cases are produced keeping the environmental directive in mind. Audipack uses environment friendly materials, like special interior bonding glue, coatings and cleaning aids.

Next to environment-friendly wood types and recycled materials, the end product is packed with self solving plastic (resi) packaging material.



Audipack Silent 6300 interpreter booth, durable and rigid

The Audipack Silent 6300 is the titan amongst the available interpreter booth's. The 6300 is a modular, semi-mobile interpreter booth suitable for 2 persons and is suited to all types of conference system.

The 60 mm thick wall panels easily let themselves install with a single alan key. When seated down a perfect working environment is being created for the interpreter. A large working table suitable to carry all needed equipment and leaving space for personal items in a special compartment underneath the table top.

A clear view is given by the 4 large sound insulation windows. In the floor a cable duct is installed to easily guide the equipment cables to and from the booth.





The basic build up of a 6300 booth

The booth consists of 8 interchangeable wall panels. Any panel can be placed on any position. This is an unique feature that allows to set-up the booth in any desired configuration.

The basic build up starts with the 2 floor panels with adjustable feet to level the whole set-up. On the floor panels the 4 of which have windows with safety glass and 1 door panel can be installed. Use the supplied alan-key to lock the panels into each other. Final the 2 roof panels with system A ventilation can be installed and connected. The table is easy to install without using tools at all.

Options and accessories Silent 6300


For the Silent series various options are available to adapt the booth and use to your convenience. Shown product are examples of standard items. On request it is possible to customize practical solutions

- ▲ Extensions set's
- ▲ Flightcase (front loader) set
- ▲ Transport cart
- ▲ Other colours and finishing's on request (options see page 26)

Benefits:

- ▲ Easy installation, can be performed by 2 persons
- ▲ Very comfortable working environment
- ▲ Carpeted floor panels
- ▲ Clear view windows (safety glass)
- ▲ Cable ducts in the floor panels
- ▲ Durable build
- ▲ Meets ISO 4043 and DIN 56924
- ▲ Standard expandable up to 4 persons

Silent 6300 series sound insulation capacity

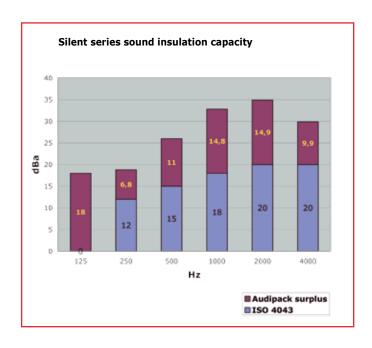

Technical testing specifications:

Signal	Pink noise
Bandwidth:	1/3 octaves
DW (ISO 717):	30 db



Technical specifications 6300

Technical specifications Audipack Silent 6300 interpreter booth

Dimensions:	
Standard internal dimensions	1600 x 1600 x 2000 mm
Standard external dimensions	1720 x 1720 x 2280 mm
Booth height including ventilation system	2118 mm
Standard table dimensions	1600 x 500 mm
Sound insulation capacity	-Better than ISO 4043 (latest version).
	-According DIN 56924 (with optional double glass)
Number of booth parts including table and floor	13 parts

Weight:	
Weight (total incl. Safety glass, table)	Approx. 340 Kg
Blind panel	Approx. 19 Kg
Window panel	Approx. 28 Kg
Roof panel + including ventilation system	Approx. 28 Kg
Door panel	Approx. 37 Kg
Working table (50 cm depth)	Approx. 16 Kg
Floor element	Approx. 31 Kg
Ventilation system A	Approx. 6 Kg

Colours:	
Standard colour exterior	Grey, code 871 (approx. RAL 7042)
Standard colours interior:	
-Wall panels	Light grey

Options:


Extension set for extending a standard booth to 3 or 4 persons (internal $2400/3200 \times 1600 \times 2000 \text{ mm}$).


Including window panel, blind panel, roof element and table extension 800 x 500 mm $\,$

Flightcase set (1 front loader and 1 top loader) for 2 person booth

Booth transport car "easy drive" (2 pieces needed)

Other colours on request

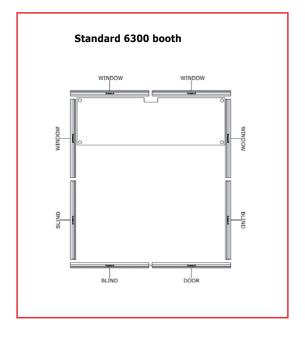

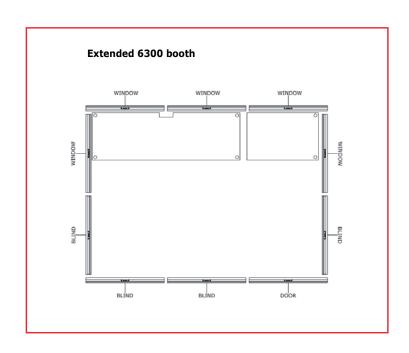



Audipack Silent 9300 interpreter booth, flexible and light weight

The Audipack Silent 9300 is the most flexible and lightest interpreter booth amongst the available interpreter booth's.

The 9300 is a also modular, but a more mobile interpreter booth suitable for 2 persons and is suited to all types of conference system. The wall panels easily let themselves install with a single alan key. When seated down a perfect working environment is being created for the interpreter. A large working table suitable to carry al needed equipment.

Tech talk

A clear view is given by the 4 large sound insulation windows. In the side panels a cable duct is installed to easily guide the equipment cables to and from the booth.

Standard the booth is suitable for 2 persons. By adding an extension set is possible to extend the booth in width by adding front, back and roof panels. In this way the booth can be enlarges very easily up to 8 persons.

The Silent 9300 meets the ISO 4043 norm and the DIN 56924 norm.



The basic build up of a 9300 booth

The booth consists of 8 interchangeable wall panels. Any panel can be placed on any position. This is an unique feature that allows to set-up the booth in any desired configuration.

The basic build up starts with one corner of the 9300 booth. Simply connect a window and blind panel with a corner post profile by using the supplied alan key.

Easily work your self around the booth and finish the booth by adding the 2 roof panels on the booth and place the ventilation units on the roof. The table is easy to install without using tools at all.


Benefits:

- ▲ Easy installation, can be performed by 1 person
- ▲ Good working environment
- ▲ Clear view windows (safety glass)
- ▲ Cable ducts in the side panels
- ▲ Durable build
- ▲ Meets ISO 4043 and DIN 56924
- ▲ 2-tone panel decoration (inside)
- ▲ Expandable up to 4 persons (options see page 26)

Options:

- ▲ Extensions set's
- ▲ Flightcase top loader
- ▲ Flightcase front oader
- ▲ Transport cart
- ▲ Other colours and finishing's on request

Silent 9300 series sound insulation capacity

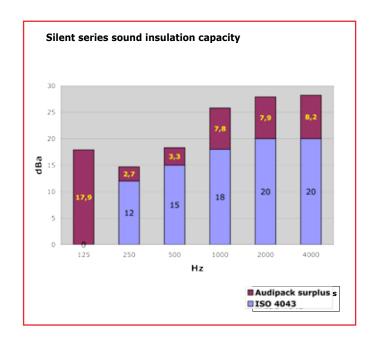

Technical testing specifications:

Signal	Pink noise
Bandwidth:	1/3 octaves
DW (ISO 717):	24 db





Technical specifications Audipack Silent 9300 interpreter booth

Dimensions:	
Standard internal dimensions	1600 x 1600 x 2000 mm
Standard external dimensions	1682 x 1682 x 2041 mm
Booth height including ventilation system A	2118 mm
Booth height including ventilation system B	2212 mm
Standard table dimensions	1600 x 500 mm
Sound insulation capacity	Better than ISO 4043 (latest version)
Number of booth parts including table	11 parts

Weight:	
Weight (total incl. Safety glass, table)	Approx. 210 Kg
Blind panel	Approx. 17 Kg
Window panel	Approx. 22 Kg
Roof panel + optional ventilation system A	Approx. 18 Kg
Door panel Approx.	19 Kg
Working table (50 cm depth)	Approx. 8 Kg
Ventilation system A	Approx. 6 Kg
Ventilation system B	Approx. 3.5 Kg

Colours:	
Standard colour exterior	Grey, code 871 (approx. RAL 7042)
Standard colours interior:	
-Wall panels from floor to table height	Dark grey
-Wall panels from table height to top and roof panels	White

Options:

Extension set for extending a standard booth to 3 or 4 persons (internal 2400/3200 x 1600 x 2000 mm).

Including window panel, blind panel, roof element and table extension $800 \times 500 \text{ mm}$

Flightcase (front loader or top loader) for 2 person booth

Flightcase for Silent 9300 3 person booth


Flightcase for 3 extension sets


Booth transport car "easy drive"

Ventilation system A (fixed)

Ventilation system B (detachable)

Other colours on request

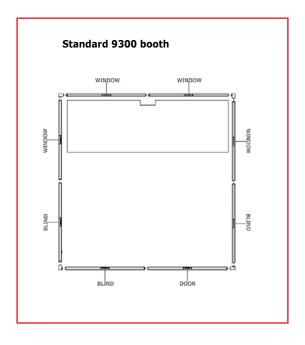

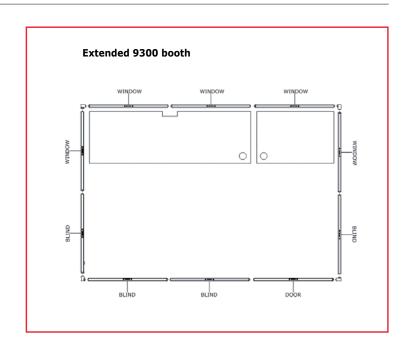



Audipack Silent 9300 WE interpreter booth, flexible, light and easy access.

The Audipack Silent 9300WE is an interpretation booth based on the 9300 booth.

A unique feature of this model is the extra wide entrance on the side of the booth. The special designed double doors provides a generous entrance for wheel chairs and buggies.

The 9300WE is a also modular, but a more mobile interpreter booth suitable for 2 persons and is suited to all types of conference system. The wall panels easily let themselves install with a single alan key. When seated down a perfect working environment is being created for the interpreter. A large working table suitable to carry al needed equipment.

A clear view is given by the 4 large sound insulation windows.

In the side panels a cable duct is installed to easily guide the equipment cables to and from the booth.

Standard the booth is suitable for 2 persons.



Silent series 9300WE

The basic build up of a 9300WE booth

The basic build up starts with one corner of the 9300 booth. Simply connect a window and blind panel with a corner post profile by using the supplied alan key.

Easily work your self around the booth and finish the booth by adding the 2 roof panels on the booth and place the ventilation units on the roof. The table is easy to install without using tools at all.

In comparence with the Silent 9300, which allows a free panel cconfiguration, the Silent 9300 WE is specially designed to provide an extra wide entrance and does not allow to set-up the booth in any configuration. Therefore the Silent 9300 WE is available in a right- and left entrance model.


Benefits:

- ▲ Easy installation, can be performed by 1 person
- ▲ Good working environment
- ▲ Clear view windows (safety glass)
- ▲ Cable ducts in the side panels
- ▲ Durable build
- ▲ Easy access
- ▲ 2-tone panel decoration (inside)
- ▲ Meets ISO 4043 and DIN 56924 (unofficially) (options see page 26)

Options:

- ▲ Flightcase top loader
- ▲ Flightcase front oader
- ▲ Transport cart
- ▲ Other colours and finishing's on request

Silent 9300WE series sound insulation capacity

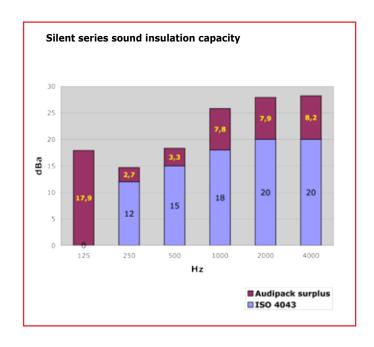

Technical testing specifications:

Signal	Pink noise
Bandwidth:	1/3 octaves
DW (ISO 717):	24 db



Technical specifications Audipack Silent 9300WE interpreter booth


Dimensions:	
Standard internal dimensions	1600 x 1600 x 2000 mm
Standard external dimensions	1682 x 1682 x 2041 mm
Booth height including ventilation system A	2118 mm
Booth height including ventilation system B	2212 mm
Standard table dimensions	1600 x 500 mm
Sound insulation capacity	Better than ISO 4043 (latest version)
Number of booth parts including table	11 parts
Entrance width	950 mm

Weight:	
Weight (total incl. Safety glass, table)	Approx. 210 Kg
Blind panel	Approx. 17 Kg
Window panel	Approx. 22 Kg
Roof panel + optional ventilation system A	Approx. 18 Kg
Door panel Approx.	19 Kg
Working table (50 cm depth)	Approx. 8 Kg
Ventilation system A	Approx. 6 Kg
Ventilation system B	Approx. 3.5 Kg

Colours:	
Standard colour exterior	Grey, code 871 (approx. RAL 7042)
Standard colours interior:	
-Wall panels from floor to table height	Dark grey
-Wall panels from table height to top and roof panels	White

Options

Flightcase (front loader or top loader) for 2 person booth Booth transport car "easy drive" Ventilation system A (fixed) Ventilation system B (detachable) Other colours on request

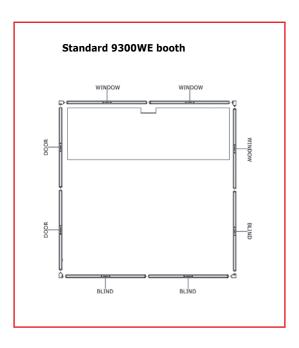



Audipack Silent 9500 interpreter booth, flexible and light

The Audipack Silent 9500 is based on the 9300 booth but is specially designed to have the smallest transport dimensions. This results in the most flexible and smallest (in transport) interpreter booth amongst the available interpreter booth's.

The 9500 is a also modular, but a more mobile interpreter booth suitable for 2 persons and is suited to all types of conference system. The wall panels easily let themselves install with a single alan key. When seated down a perfect working environment is being created for the interpreter.

A large working table suitable to carry al needed equipment.

Tech talk

A clear view is given by the 4 large sound insulation windows.

In the side panels a cable duct is installed to easily guide the equipment cables to and from the booth.

Standard the booth is suitable for 2 persons. By adding an extension set is possible to extend the booth in width by adding front, back and roof panels. In this way the booth can be enlarges very easily up to 8 persons.

The Silent 9500 meets (klopt dit?) the ISO 4043 norm and the DIN 56924 norm.



The basic build up of a 9500 booth

The booth consists of 14 smaller wall, door and window panels. The assembly in equally performed like the 9300 booth only more panels need to be installed and connected.

The basic build up starts with one corner of the 9500 booth. Simply connect window and blind panel segments with a corner post profile by using the supplied alan key.

Easily work your self around the booth and finish the booth by adding the 2 roof panels on the booth and place the ventilation units on the roof. The table is easy to install without using tools at all.


Benefits:

- ▲ Small transport dimensions
- ▲ Easy installation, can be performed by 1 person
- ▲ Good working environment
- ▲ Clear view windows (safety glass)
- ▲ Cable ducts in the side panels
- ▲ Durable build
- ▲ Meets ISO 4043 and DIN 56924
- ▲ 2-tone panel decoration (inside)
- ▲ Expandable up to 3 persons (options see page 26)

Options:

- ▲ Extensions set's
- ▲ Flightcase (front loader)
- ▲ Transport cart
- ▲ Other colours and finishing's on request

Silent 9500 series sound insulation capacity

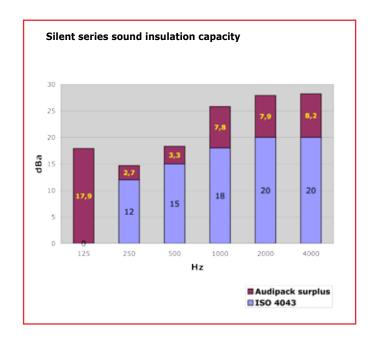

Technical testing specifications:

Signal	Pink noise
Bandwidth:	1/3 octaves
DW (ISO 717):	24 db





Technical specifications Audipack Silent 9500 interpreter booth

Dimensions:	
Standard internal dimensions	1600 x 1600 x 2000 mm
Standard external dimensions	1682 x 1682 x 2041 mm
Booth height including ventilation system B	2212 mm
Standard table dimensions Standard	1600 x 500 mm
Sound insulation capacity	Better than ISO 4043 (latest version)
Number of booth parts including table	16

Weight:	
Weight (total incl. safety glass, table)	Approx. 220 Kg
Maximum panel weight	Approx. 18 Kg
Working table (50 cm depth)	Approx. 8 Kg
Ventilation system B (A system is not possible)	Approx 3.5 Kg

(Because the 9500 booth is assembled with different panel sizes, only the largest panel weight is mentioned)

Colours:	
Standard colour exterior	Grey, code 871 (approx. RAL 7042)
Standard colours interior:	
-Wall panels from floor to table height	Dark grey
-Wall panels from table height to top and roof panels	White

Options:

Extension set for extending a standard booth to 3 persons (internal 2400 x 1600 x 2000 mm).

Including window panel, blind panel, roof elements and table extension $800 \times 500 \text{ mm}$


Flightcase for Silent 9500 (2 pers.) 1600 x 1600 mm booth


Flightcase for Silent 9500 2400 x 1600 mm booth

Booth transport car "easy drive"

 $\label{eq:Ventilation} \mbox{ Ventilation system } \boldsymbol{B} \mbox{ (detachable)}$

Other colours on request

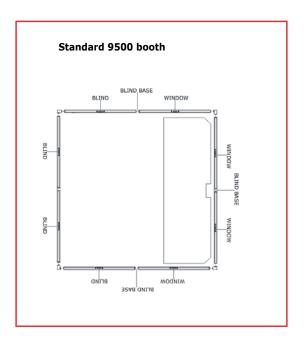

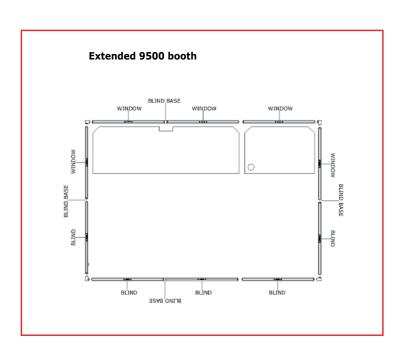





Options and accessoiries for the Silent series

For the Silent series various options are available to adapt the booth and use to your convenience. Shown product are examples of standard items. On request it is possible to customize practical solutions

It's great to have solutions...

Since 1982 Audipack is your partner in designing and manufacturing the best transport, presentation and mounting solutions for your audiovisual equipment.


The increasing use of audiovisual media in public and private life changes the demands for audiovisual systems. Audipack offers accessories for today's audiovisual systems, either in the office or in public spaces, at home or at events, for temporary or permanent installations.

Did you know that...

All Audipack products, the standard products and the custom-built ones, are designed and manufactured in-house in the Netherlands. Developed in coöperation with clients, to comply with the needs of professionals and end users. Designed for ease of use and durability for many years. Manufactured as singular made to measure pieces or in high volumes, as standard products or for unique projects.

Discover Audipack's flat panel and projector accessories in this catalogue. If you can't find a suitable solution, contact us and challenge us with your request. More product details can be found on our website,

www.audipack.com

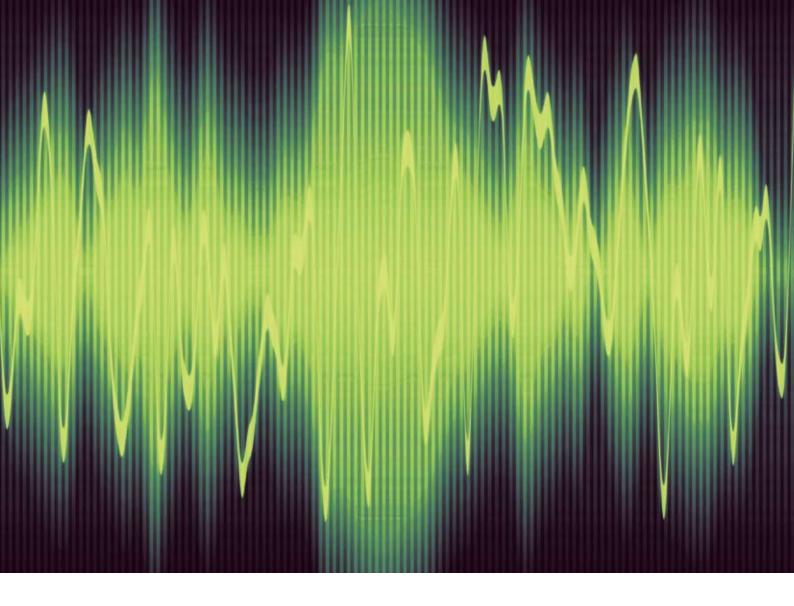

Options and accessories for the Silent series

For the Silent series various options are available to adapt the booth and use to your convenience. Shown product are examples of standard items. On request it is possible to customize practical solutions

Flightcase set for the 6300/9300 / 9300WE Silent booths

Part no.: front loader 5604 / 15645 Part no.: top loader 5887 / 9749

The 6300/9300/9300WE flightcase set carries 1 complete 6300/9300 Silent booth devided over 2 flightcases. The Case is available in a standard front loader and a top loader.

Case dimensions:

L 600 x D 2080 x H 1110 mm



General options

Flightcase for the 9500 Silent booth

Part.no.: 8969

The 9500 flightcase carries 1 complete 9500 Silent booth.

Case dimensions (incl. castors): L 660 x D 1920 x H 1050 mm



Part no.: P1769

The transport cart carries 1 complete Silent booth.

Assembly aid

Part no.: P1866

With the assembly aid it is easy to assemble the 9300 booth with 1 person. By positioning the first panel with the aid, it can be left free standing. Assembling the second panel and continuing with the rest is very easy.

Suitable for 9300, 9300WE, 9500

Ventilation A

Dimensions L 1490 x D 204 (240) x H 85 mm

230 VAC 50-60 Hz Suitable for 6300, 9300, 9300WE

Ventilation B

Dimensions W 274 x D 257 x H 166 (182) mm

230 VAC 50-60 Hz Suitable for 9300, 9300WE, 9500

More options see price list











AP/FC/EN/V1.0/2009



Industriestraat 2 NL-2751 GT Moerkapelle The Netherlands Tel. +31795931671 Fax +31795933115 audipack@audipack.com www.audipack.com

Your Audipack® dealer:		